


VANDAL RESISTANT LINEAR LED

- The **SPADA®** is a vandal and impact resistant fixture.
- **HOUSING:** 1 single piece constructed of high quality extruded aluminum, allowing for excellent heat dissipation.
- **DIFFUSER:** Extruded UV stabilized polycarbonate lens providing reduced glare.
- **LUMENS:** **LO:** 4380 up to 4660 lm
HO: 5477 up to 5826 lm
- **OPERATING TEMP:**
HT (AC Only) -20°C up to 40°C (-4°F up to 104°F)
- **WEIGHT:** 7 lbs. / 3.2 kg.

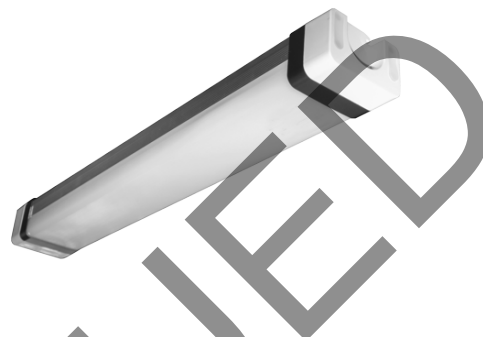

APPLICATION: The **SPADA®** is ideal for manufacturing facilities, work stations, locker rooms, schools, breezeways, government facilities, prisons, public areas, offices, meeting rooms, hotels, hospitals, supermarkets, shopping malls, large retailers, libraries, schools, manufacture warehouses, parks, exhibition centers, gas stations, toll stations and gymnasiums.

AVAILABLE MODELS

2 FOOT

SPA-2HT-LO-WT30-120-277V
SPA-2HT-LO-WT35-120-277V
SPA-2HT-LO-WT40-120-277V
SPA-2HT-LO-WT50-120-277V

4 FOOT


SPA-4HT-LO-WT30-120-277V
SPA-4HT-LO-WT40-120-277V
SPA-4HT-LO-WT50-120-277V
SPA-4HT-HO-WT30-120-277V
SPA-4HT-HO-WT50-120-277V

NOTE 1: Surface mount is standard.


NOTE 2: See other mounting options below.

NOTE 3: Logica (Beghelli wireless and powerless control solutions) is available. Contact factory for more details.


TECHNICAL INFORMATION

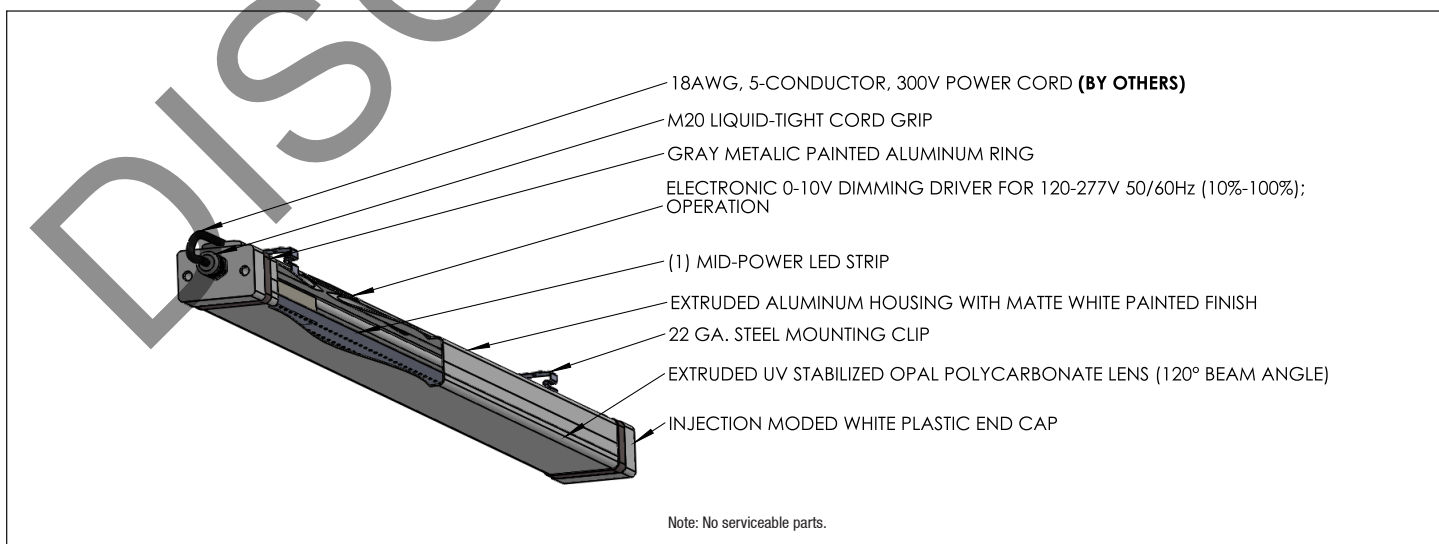


DIMENSIONS

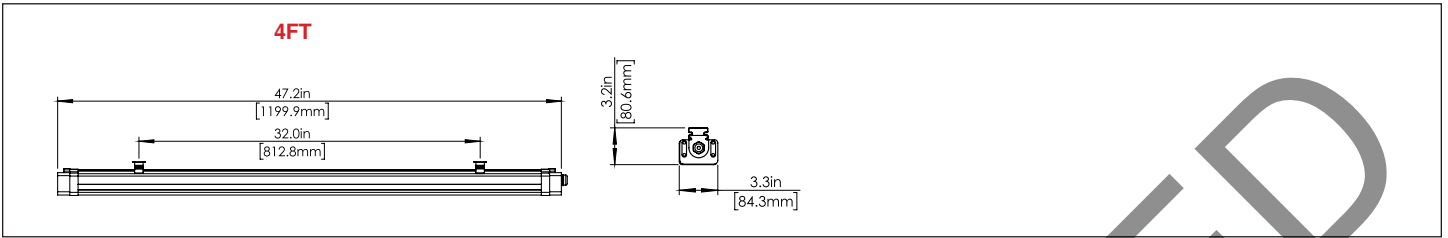

MOUNTING OPTIONS

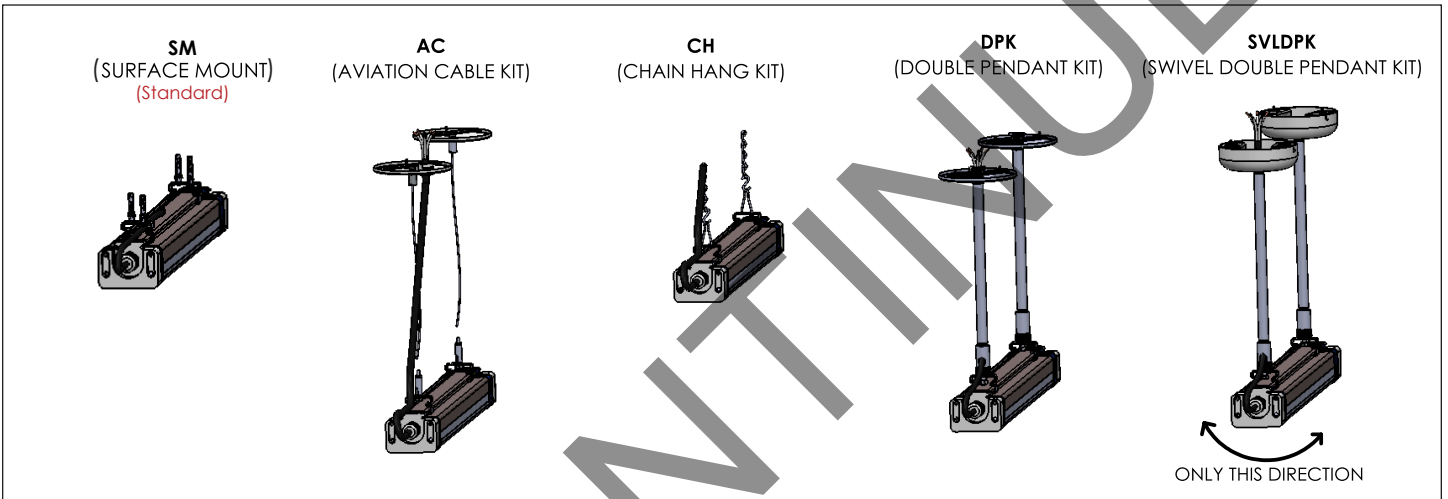

PHOTOMETRICS

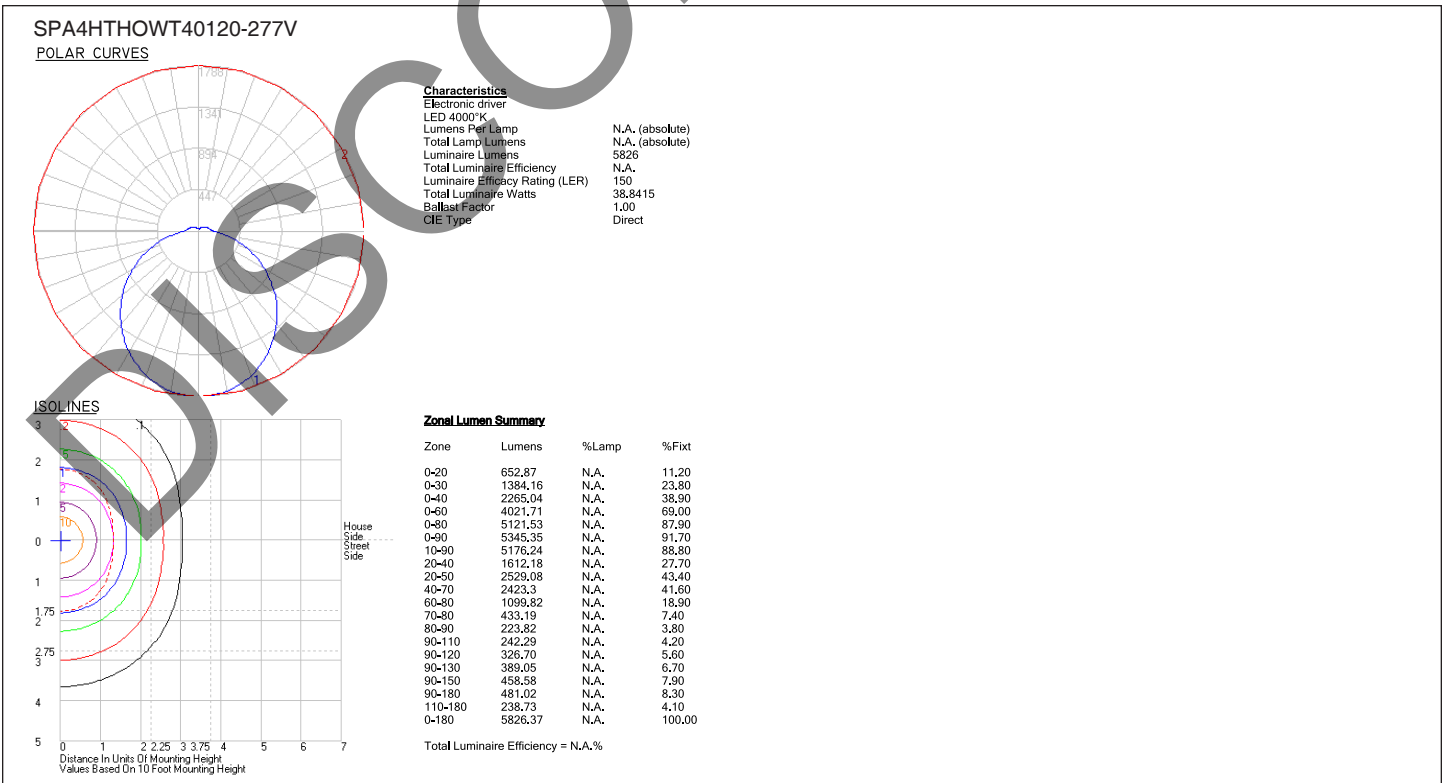


ENERGY CHART

MODEL	LENGTH	EFFICACY	CONSUMPTION WATTAGE	LUMEN OUTPUT	CRI	L70 (hrs.)	L84 (hrs.)
SPA4HTLOWT30-120-277V	4 ft	112 lm/W	40	4380	>80	>60,000	>52,000
SPA4HTLOWT30-120-277V	4 ft	119 lm/W	40	4660	>80	>60,000	>52,000
SPA4HTLOWT30-120-277V	4 ft	119 lm/W	40	4660	>80	>60,000	>52,000
SPA4HTHOWT30-120-277V	4 ft	141 lm/W	40	5477	>80	>60,000	>52,000
SPA4HTHOWT30-120-277V	4 ft	150 lm/W	40	5826	>80	>60,000	>52,000
SPA4HTHOWT30-120-277V	4 ft	150 lm/W	40	5826	>80	>60,000	>52,000

ELECTRICAL RATING

PRODUCT	NOMINAL POWER (W)	AC CURRENT (A) AC VOLTAGE		FREQUENCY (HZ)	DC VOLTAGE	DC CURRENT (MA)	DIMMER COMPATIBILITY	
		120V	277V				DIMMER	COMPATABILITY ON / OFF DIMMING
SPA4HTLOWT40-120-277V	40	0.35	0.16	50/60	34.92	1050	LEVITON - AWRMG - 7	YES YES
SPA4HTHOWT40120277V	40	0.35	0.16	50/60	35.23	1050	LUTRON - DIVA - DVSTV LUTRON - DIVE - DVTV WATT STOPPER - DCLV1	YES YES YES YES YES YES

LOGICA (WIRELESS & POWERLESS LIGHTING CONTROL SOLUTIONS)

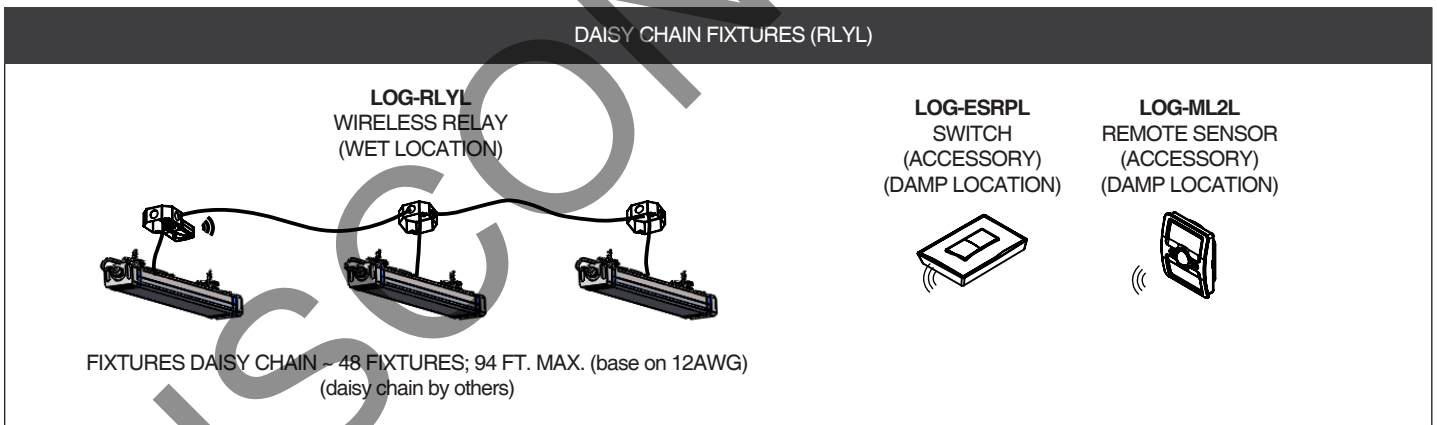

■ **WARRANTY:** 5 year warranty, see website for full warranty details.