

SEA REMOTE



Remotes

Job/Location: _____	Job Type: _____
Contractor: _____	Date: _____
Prepared By: _____	



external specifications

The **SEA remote** is made from die-cast aluminum head and the glass lens offer protection and superior performance. The powder coated aluminum canopy is fully gasketed and suitable for wet location. The flex arm design allows you to position the remote by moving the flex arm up and down as you rotate side to side.

nema 4x design


The **SEA remote** has been designed to withstand moisture and corrosive elements and has a NEMA 4X rating. The entire internal cavity of the remote is protected from moisture ingress by an extremely resilient gaskets. The operating temperature is from -22°F up to 104°F (-30°C up to 40°C).

ordering information

Sea remote	Head No.	Voltage	Lamp	Options
SEA	1 (single)	6V	See Lamp Selection	TC (Teflon® coated lens)
	2 (double)	12V		
		24V		

EXAMPLE: SEA-2-12V5W-LED

dimensions (in,mm.)

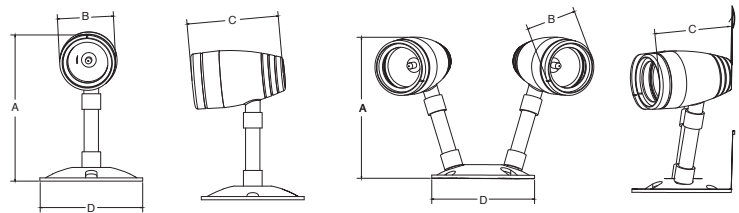

SEA remote	A	B	C	D
Single Head	5 ⁷ / ₈ " 149mm	2 ¹ / ₄ " 57mm	3 ¹¹ / ₁₆ " 94mm	4 ¹ / ₈ " 105mm
Double Head	5 ⁵ / ₈ " 143mm	2 ¹ / ₄ " 57mm	3 ¹¹ / ₁₆ " 94mm	4 ¹ / ₈ " 105mm

■ installation

The **SEA remote** is supplied with a weatherproof canopy designed to fit most electrical junction boxes for surface ceiling or wall mount applications. Suitable for indoor, outdoor, damp or wet location applications with NEMA 4X protection.

■ sanitation listed



The **SEA remote** is sanitation listed. The Intertek verified splash zone listing is equivalent to the NSF standard 2, meeting the rigorous sanitation standards of food service environments.

■ lamp selection

	6V	12V	24V
MR16	-	20, 35, 50W	-
MR16 LED	5, 7W	2, 5, 7W	5, 7W

■ warranty

The **SEA remote** comes with a 3-year factory warranty. Lamps are not covered under the warranty. Deliberate damage, misuse, improper installation effectively cancel the warranty.